



**BACKSHEET MONOCRYSTALLINE MODULE**

PRODUCT: TSM-DE21

POWER RANGE: 650-675W

**675W**


MAXIMUM POWER OUTPUT

**0~+5W**

POSITIVE POWER TOLERANCE

**21.7%**

MAXIMUM EFFICIENCY

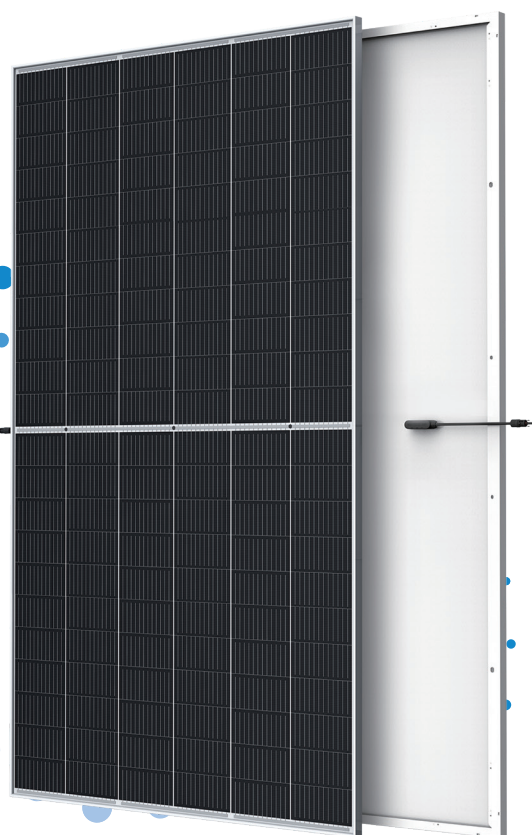

**High customer value**

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- Lower first year and annual degradation
- Designed for compatibility with existing mainstream system components



**High power up to 675W**

- Up to 21.7% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



**High reliability**


- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity areas
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



**High energy yield**

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.34%) and operating temperature

**Trina Solar's Backsheet Performance Warranty**




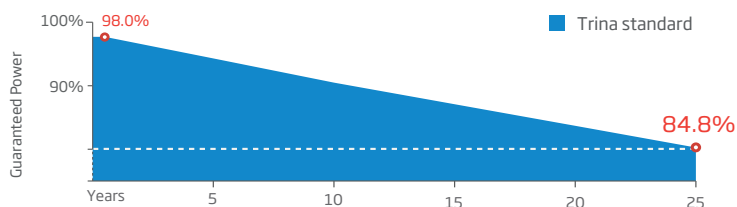


**Comprehensive Products and System Certificates**



IEC61215/IEC61730/IEC61701/IEC62716/UL61730  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse Gases Emissions Verification  
 ISO45001: Occupational Health and Safety Management System

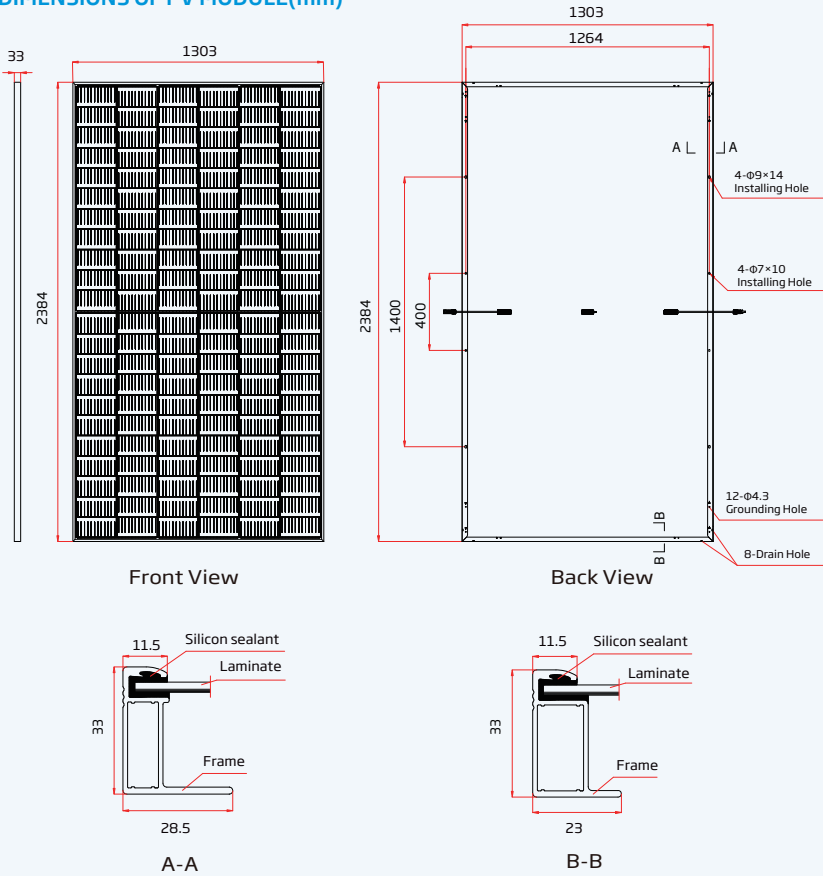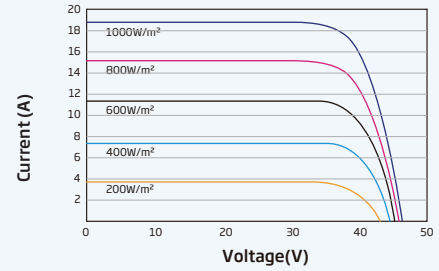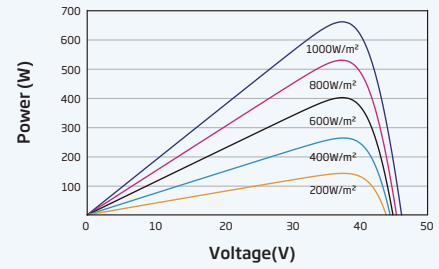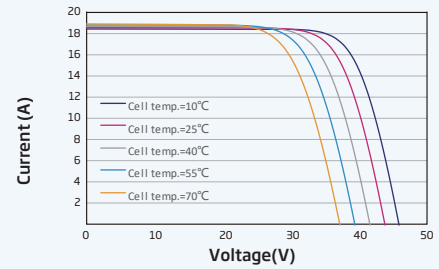

**DIMENSIONS OF PV MODULE(mm)**

**I-V CURVES OF PV MODULE(665 W)**

**P-V CURVES OF PV MODULE(665W)**

**I-V CURVES OF PV MODULE(665 W)**

**ELECTRICAL DATA (STC)**

Parameter	655	660	665	670	675
Peak Power Watts-P <sub>MAX</sub> (Wp)*	655	660	665	670	675
Power Tolerance-P <sub>MAX</sub> (W)	0 ~ +5				
Maximum Power Voltage-V <sub>MPP</sub> (V)	37.6	37.8	38.0	38.2	38.4
Maximum Power Current-I <sub>MPP</sub> (A)	17.43	17.47	17.51	17.55	17.58
Open Circuit Voltage-V <sub>OC</sub> (V)	45.5	45.7	45.9	46.1	46.3
Short Circuit Current-I <sub>SC</sub> (A)	18.48	18.53	18.57	18.62	18.66
Module Efficiency η <sub>m</sub> (%)	21.1	21.2	21.4	21.6	21.7

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. \*Measuring tolerance: ±3%.

**ELECTRICAL DATA (NOCT)**

Parameter	496	500	504	508	511
Maximum Power-P <sub>MAX</sub> (Wp)	496	500	504	508	511
Maximum Power Voltage-V <sub>MPP</sub> (V)	35.1	35.3	35.4	35.6	35.8
Maximum Power Current-I <sub>MPP</sub> (A)	14.13	14.17	14.22	14.26	14.29
Open Circuit Voltage-V <sub>OC</sub> (V)	42.9	43.0	43.2	43.4	43.6
Short Circuit Current-I <sub>SC</sub> (A)	14.89	14.93	14.96	15.01	15.04

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

**MECHANICAL DATA**

Solar Cells	Monocrystalline
No. of cells	132 cells
Module Dimensions	2384×1303×33 mm (93.86×51.30×1.30 inches)
Weight	32.3 kg (71.2 lb)
Glass	3.2 mm (0.13 inches), High Transmission, Tempered Glass
Encapsulant material	EVA
Backsheet	White
Frame	33mm(1.30 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ) Portrait: 350/280 mm(13.78/11.02 inches) Length can be customized
Connector	MC4 EV02 / TS4 Plus/ TS4*

\*Please refer to regional datasheet for specified connector.

**TEMPERATURE RATINGS**

NOCT(Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P <sub>MAX</sub>	-0.34%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.04%/°C

**MAXIMUM RATINGS**

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	30A

**WARRANTY**

12 year Product Workmanship Warranty  
 25 year Power Warranty  
 2% first year degradation  
 0.55% Annual Power Attenuation

(Please refer to product warranty for details)

**PACKAGING CONFIGURATION**

Modules per box: 33 pieces  
 Modules per 40' container: 594 pieces